

Meet
SMARTER



ASTROS Station AS-201

Central Hub for Collaboration



BYOD & BYOM
Support




WPA2-Protected
Data Encryption



Cross-Platform
Compatibility



Instant
Native Mirroring

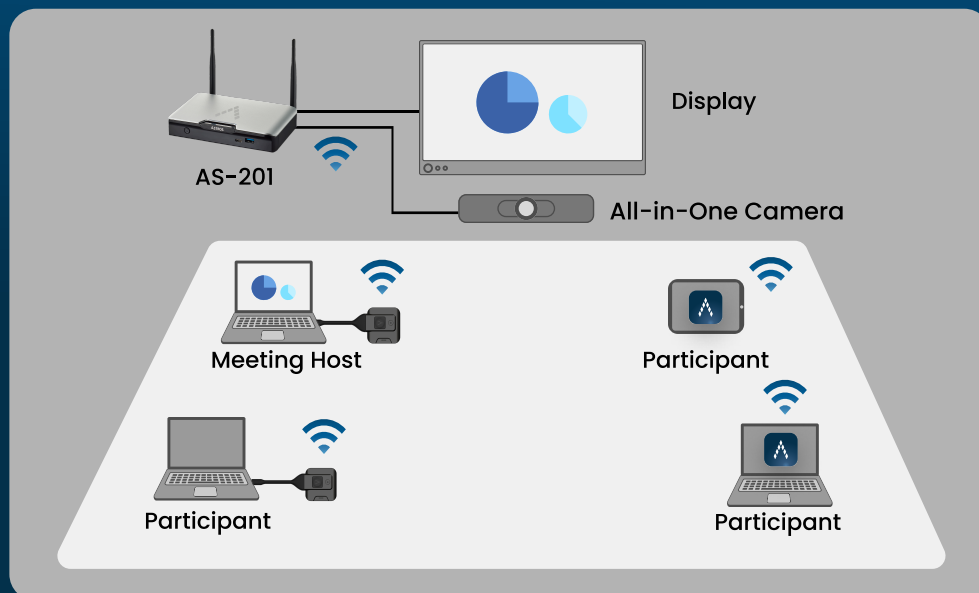

ASTROS
by ASTROGATE

Wireless BYOD & BYOM



4K Video Output

Showcase your content in vibrant 4K resolution.



Touch Back

Control your laptop directly via touch displays and peripherals.



Moderation

Control what shows—clean, clear, professional.



Annotation Tools

Draw, highlight, and collaborate on-screen.



Remote View

Access live screen content from your personal device.



1-to-Many

Present your screen to up to four displays at once.



Smart Sharing

Pick between full screen or specific app windows.



Slide Show

Auto replay images on a continuous loop.



Split Screen

View up to four sources side by side.



Login Code

Use a code to prevent unauthorized access.



OTA Update

Keep Devices Up-to-Date wirelessly.



GateKeeper

Securely manage access for all users.

Specification

Compatible OS	Windows 10 or later macOS 12.5 or later (BYOM 13.5 or later) iOS 14 or later Android 11.0 or later Chrome OS 84 or later
Support Protocol	Airplay, Google Cast, Miracast, BeamOp, Browser Sharing
Video Output	HDMI, VGA
Video Output Resolution	HDMI: up to 4K @60Hz HDMI+VGA: up to 1080p @60Hz
Audio Output	HDMI & 3.5mm Audio Jack
Wi-Fi Band	Switchable dual band 2.4GHz / 5GHz (DFS channels not supported)
Wireless Transmission Protocol	IEEE 802.11ac
Encryption Protocol	AP Mode: WPA2-PSK Station Mode: WEP, WPA, WPA2, 802.1x EAP
Ethernet	10/100/1000 Mbps RJ-45 LAN (PoE supported)
LAN	Single LAN port
I/O Ports	HDMI, VGA, USB 2.0 Type-A, USB 3.0 Type-A, USB 3.0 Type-C, 3.5mm Audio Jack, 10/100/1000 Ethernet LAN, Power Jack
Power	DC input, PoE supported
Power Supply	PSU: 12V / 2A, PoE: 48V / 0.32A
Net Weight	500g
Dimensions (H x W x D)	170 x 104.4 x 30.5 mm
Temperature	Operating: 0°–40°C (32°–104°F), Storage: -10°–70°C (14°–158°F)
Humidity (non-condensing)	Operating: 20%–80%, Storage: 10%–90%
Certifications	FCC, CE, NCC, BSMI, and other regional regulatory approvals
Warranty	3-Year Warranty